

Depth Gauge with Protractor

Allows for measurement of both angles and depths

Manufactured from stainless steel

Protractor head with permanent deep etched graduations, 0-180° in opposite directions, permits reading an angle directly


Depths are measured by 6" (150 mm) steel rule. Rule can be set at desired angle for use as protractor & lengthwise when used as depth gauge

Graduated in both imperial and metric.

Knurled thumb nut to lock the rule in desired position

ORDERING INFORMATION

CAT NR.	ORD NR.	HEAD	BOX QTY.
PDG/6	01221	Round	120
PDG/R/6	01225	Rectangular	120

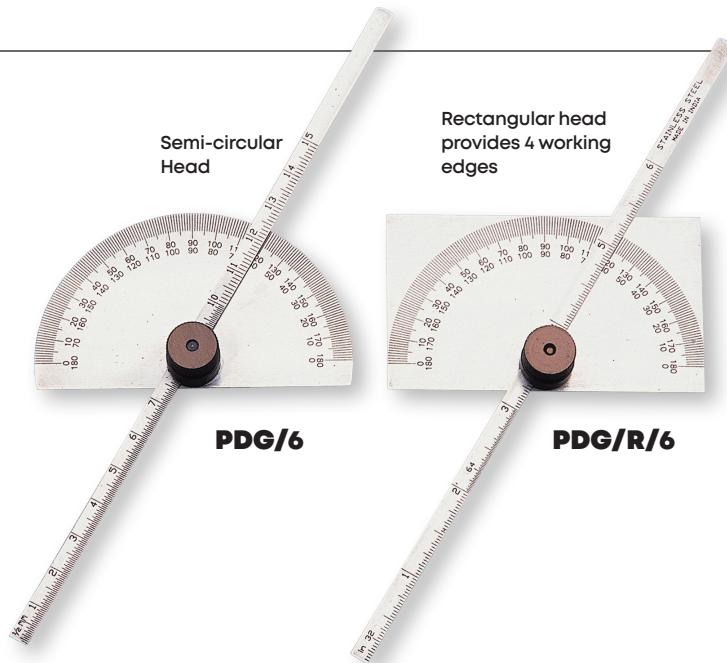

SPECIFICATIONS

ANGULAR TOLERANCE	± 0.05°
-------------------	---------