

Grease Swivels High Pressure

HFC-S

HFC-R

HFC-Z



Swivels are installed between the delivery hose & grease control valve: these permit easy handling of control valves and prevent damage to hose caused by twisting

Heavy duty steel construction with ball bearings for smooth operation and free unrestricted movement


The swivelling joints are hardened for durability & wear resistance

Available in 3 forms

- Straight - HFC - S: Single axis swivelling movement
- 90° - HFC - R: 2 axes - 90° movement
- Z-360° - HFC - 3 axes - 360° movement

SPECIFICATIONS

MAX. WORKING PRESSURE	UPTO 6,000 PSI	UPTO 413 BAR
--------------------------	-------------------	-----------------

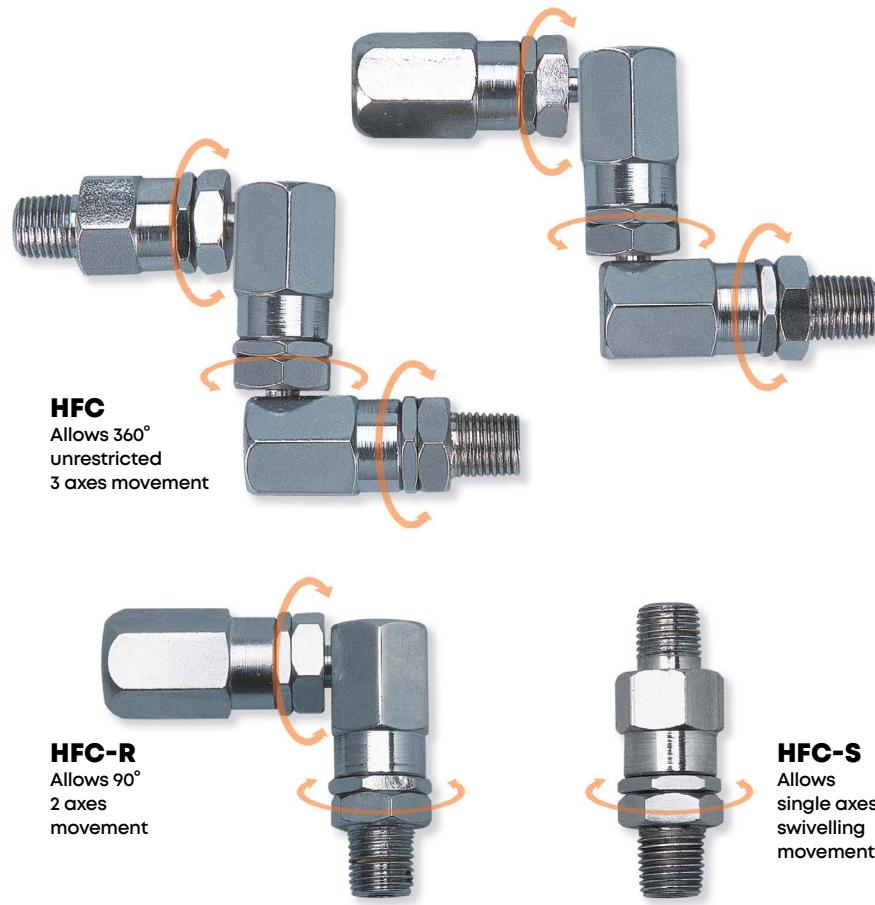

ORDERING INFORMATION

CAT NR.	ORD NR.	THREAD SPECIFICATION	BOX QTY.
STRAIGHT SWIVELS			
HFC/S/1-4F/1-4M/B	43800	1/4" BSPT (F)	1/4" BSPT (M)
HFC/S/1-4F/1-8M/B	43801	1/4" BSPT (F)	1/8" BSPT (M)
HFC/S/1-8M/1-8M/N	43802	1/8" NPTF (M)	1/8" NPTF (M)
HFC/S/1-8F/1-8M/N	43803	1/8" NPTF (F)	1/8" NPTF (M)
HFC/S/1-4M/1-2-27M/N	43804	1/4" NPTF (M)	1/2"-27 NS (M)
90° SWIVELS			
HFC/R/1-4F/1-4M/B	43810	1/4" BSPT (F)	1/4" BSPT (M)
HFC/R/1-4F/1-8M/B	43811	1/4" BSPT (F)	1/8" BSPT (M)
HFC/R/1-8M/1-8M/N	43812	1/8" NPTF (M)	1/8" NPTF (M)
HFC/R/1-8F/1-8M/N	43813	1/8" NPTF (F)	1/8" NPTF (M)
HFC/R/1-4M/1-2-27M/N	43814	1/4" NPTF (M)	1/2"-27 NS (M)
Z - 360° SWIVELS			
HFC/1-4M/1-4M/B	43820	1/4" BSPT (M)	1/4" BSPT (M)
* HFC/1-4F/1-4M/B	43821	1/4" BSPT (F)	1/4" BSPT (M)
* HFC/1-4F/1-8M/B	43822	1/4" BSPT (F)	1/8" BSPT (M)
* HFC/1-4F/1-8M/N	43823	1/4" NPTF (F)	1/8" NPTF (M)
* HFC/1-4F/1-4M/N	43824	1/4" NPTF (F)	1/4" NPTF (M)
* HFC/1-4M/1-2-27M/N	43825	1/4" NPTF (M)	1/2"-27 NS (M)

* Best Seller



360° Z Swivel

Allows for convenient movement of the control valve & prevents the high pressure hose from kinking