

**62**

## Grease Gun Swivel - High Pressure

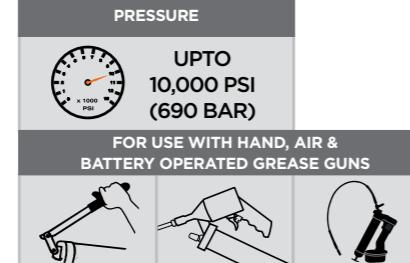
Grease Gun extension swivel threaded 1/8" Male x 1/8" Female

All steel heavy duty construction: can withstand high pressure applications with ease

Hexagonal nut allows easy tightening

Female end of the swivel fits onto the Grease Gun extension & male end onto the Grease Gun outlet, enabling unrestricted movement without any bending, twisting or kink

### FEATURES


**NEW!**


### ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS
SWV/HP/1-8M/1-8F/B	44874	1/8" BSPT
SWV/HP/1-8M/1-8F/M	44883	M10 x 1
SWV/HP/1-8M/1-8F/N	44884	1/8" NPT


**63**

## 360° Slim Line Swivel Coupler

Designed for convenient access into narrow, inaccessible greasing joints

Hardened coupler body & swivel joints withstand high-pressure applications without deformation

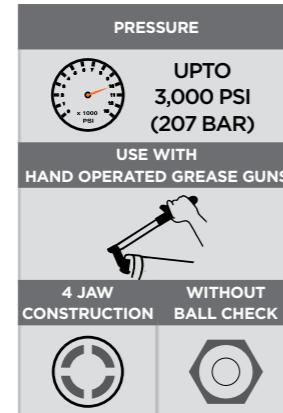
Swivels in full 360° circle & locks conveniently at any 45° position. 45° angle gives easy access to most grease fittings

Spring steel jaws are fully hardened for extended service life

Spring loaded ball check valve helps retain pressure

Zinc plated finish

### FEATURES

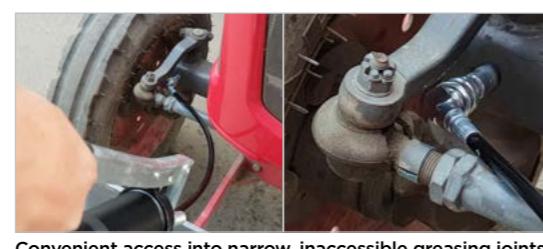

**NEW!**

**360°**

Hexagonal nut allows easy tightening

### ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS
HC/SW/11/4/B	43533	1/8" BSPT
HC/SW/11/4/M	43534	M10 x 1
HC/SW/11/4/N	43538	1/8" NPT


**SWV-HP**
**64**

## Deluxe Steel Bearing Packers

Rugged steel Bearing Packers

Useful for greasing bearings in cars, boats, tractors, RV's etc

### BEP-625

- Rapid action Bench Type Bearing Packer
- Non threaded top cone for fast placement of bearings
- Design incorporates grease nipple on the outer shaft, which easily adapts to the grease gun coupler
- Suited for bearings with a min. inner diameter of 1/2" (12 mm), to a max. outer diameter of 6" (150 mm) and height from 3/8" (10 mm) to 2" (50 mm)
- For use with standard grease guns



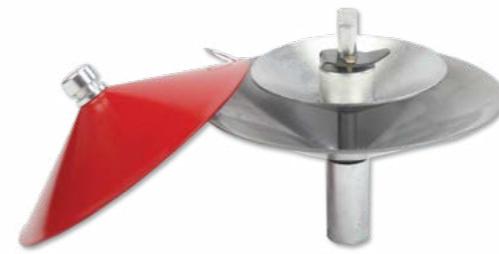
### BEP-01

- Bearing Packer with threaded center post
- Design incorporates grease nipple at one end, which easily adapts to the grease gun coupler.
- Suited for bearings with a min. inner diameter of 1/2" (12 mm), to a max. outer diameter of 5" (125 mm) and height from 1/4" (6 mm) to 2" (50 mm)
- For use with standard grease guns



### BEP/625/WB

- Rapid Action Bearing Packer
- Non threaded top cone for fast placement of bearings
- Outer shaft is threaded 1/4" NPT (F) & fits onto the Outlet Discharge Tube of the Grease Filler Pump
- Suited for bearings with a min. inner diameter of 1/2" (12 mm), to a max. outer diameter of 6" (150 mm) and height from 3/8" (10 mm) to 2" (50 mm)
- For use with grease gun filler pumps



### USEFUL TIPS!

Always use recommended grade of grease. Some grades of grease cannot handle temperatures of wheel bearing applications

Do not use compressed air for cleaning the bearing prior to use with the bearing packer. This is unsafe and could damage the race



### ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
BEP/01	44845	For use with grease guns	30
BEP/625	44847	For use with grease guns	12
BEP/625WB	44848	For use with filler pump	12