





INSTRUCTION MANUAL

S3900, REV B

Underhood Light High Intensity – Glare Free

LED-353

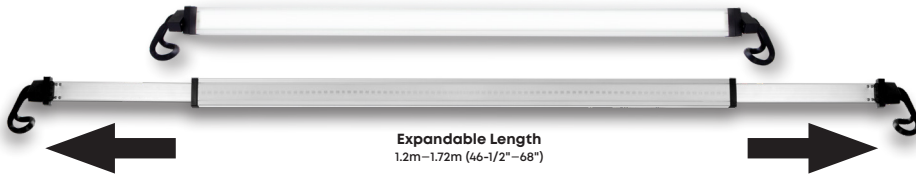

World's First 5000 Lumen Underhood Light

Flicker-free and glare-free light ensures constant work output

Multi-mode output

Multiple mode output ensures user comfort

	1ST PRESS	2ND PRESS	3RD PRESS
	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY
LUMEN	5000	2500	1000
RUN TIME	3 hrs	6 hrs	15 hrs

Sturdy Construction

- Aluminium extruded body
- Strong steel hooks with non-marring rubber coating
- Hooks can be conveniently rotated for firm grip

Expandable Length

Expandable length 1.2m–1.72m (46-1/2"–68") provides maximum utility for under-hood, undercarriage or over-dash applications

Charging of Battery

Battery can be recharged using in-built Type C charging port

Complete with 9' long cable for uninterrupted charging even when light is in use & AC power adaptor

CAT NR.	SIZE	
	(INCH)	(MM)
LED/353	46-1/2 × 2 × 3	1188 × 50 × 75



POWER SOURCE



7.4V 5000 mAh






PACKAGING CONTENT

DESCRIPTION	QUANTITY
Light	1
USB cable	1
Adaptor	1

NOMENCLATURE



1. Hooks for mounting
2. Glare-Free SMD LEDs
3. Battery indicator LEDs
4. Charging port Type C
5. ON/OFF Button

SAFETY INFORMATION

- Keep the work area clean and dry. Damp or wet work areas can result in injury.
- Check for damaged parts and any other conditions that may affect the operation of this product. Replace damaged parts immediately.
- Do not use the lamp in the immediate vicinity of inflammable materials or gases.
- Only use the accessories included with the product.
- Keep the lamp out of reach of unauthorized persons, especially children.
- Do not point the light directly in your own or any other person's or animal's eyes.
- Do not attempt to open the battery compartment.

OPERATING INSTRUCTIONS (Refer "NOMENCLATURE")

Charging:

- Connect the Type C end of the charging cable to the charging port on the work light.
- Insert the USB end of the cable into the USB port on the wall charger.
- Plug the AC charger into a live AC outlet. The green LEDs will light, to indicate battery status.
- Charging will take 8 hours. When the battery is fully charged, all four LEDs will be lit.
- Now the light is ready for use.
- Fully charge the battery before the first use.

Operation:


- To switch ON the light press the button at the side of the unit.
- Press the button once for 5000 lumens light
- Press the button twice for 2500 lumens light
- Press the button thrice for 1000 lumens light
- Press the button four times to switch off the lights.

MAINTENANCE

- Before cleaning the LED work light, disconnect the Type C cable (if being charged) and allow the work light to cool down sufficiently.
- Clean with a dry or slightly moist, clean, lint free cloth and a mild detergent if required.
- Do not use cleaners that contain abrasives or solvents.
- Check the LED work light for damage before each use. If the lens is damaged it must be replaced immediately.
- Clean any dirt from the housing or the lens immediately, since it could cause overheating.

INSTRUCTIONS FOR PROPER USE OF UNDERHOOD LIGHT

- Make sure that the light does not fall from a height as it can damage the bracket and housing of the light



- Light should not be bent in any direction as it puts pressure onto the hooks and it can get damaged



- Avoid putting any horizontal force onto the light as it can damage the light



- While removing the light from the vehicle, hold the light firmly and ensure that the light is retracted slowly to avoid excessive force on the hook and prevent its damage



- Do not pull the light with any excessive force as it can damage the light

DISPOSAL

The components or the used products must be given to companies that specialize in the disposal and recycling of industrial waste.





NOTE



Groz Engineering Tools Pvt. Ltd.
Groz Net Industries

Village Kherki Daula, National Highway-8,
Gurugram-122004, Haryana, INDIA

Tel +91.124.282.7700

E-Mail info@groz-tools.com

Url www.groz-tools.com

The GROZ name, GROZ logo and the  mark are
trademarks of GROZ Engineering Tools Pvt. Ltd., India

