



4500



12 HRS
of power standby



4.5 HRS



80M / 262"



120°

Powerful multi-directional flooding output

Light Output

Twin heads deliver high quality, uniform illumination upto 4500 Lumens

Single button controlled multiple settings for optimized control over output and run-time

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS
INTENSITY	25%	50%	75%	100%
LUMENS	750	1500	3000	4500
RUN TIME	12 hours	6 hours	3.5 hours	2 hours

Sturdy Construction

- a. IP 54 Rated**
Protected against dust and effects of water spray from any direction
- b. IK 07 Rated**
Impact-proof nylon body and handle with sturdy polycarbonate lens will stand-up to tough jobsite conditions

Versatile Use

- Can be used as
1. Compact and portable, free standing floodlight bright enough to light up large areas
- 2. On tripod stand to light overhead work and minimize shadows when directing the light downwards

Replaceable battery back gives infinite life to the worklight. Light has a working life upto 100,000 hours of use

Charging of Battery
100-240V—20V 11A charger (included)

Charge Your Phone
Rechargeable and removable battery pack doubles up as a power bank

POWER SOURCE




Li-Ion


14.8V 5200 mAh




LED-680
Floodlight

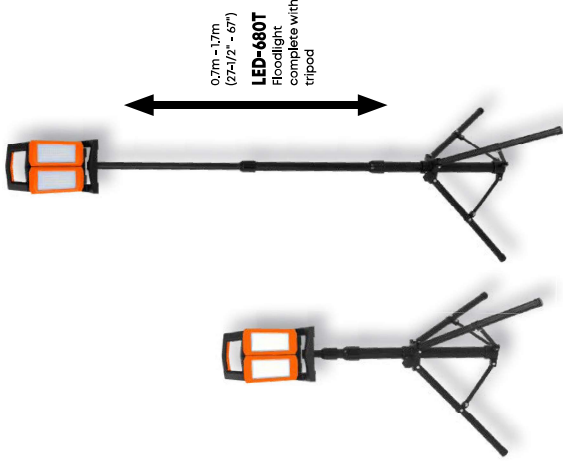

TURN, TWIST TO FOCUS AS REQUIRED

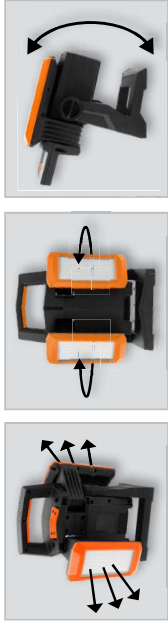

Duo Play



180° Horizontal



90° Vertical

SUPER HEAVY DUTY POWER TOOL BATTERY PACK




14.8V 5200mAh Li-Ion Super
Heavy Duty Power Tool Battery Pack



Battery Level Indicator via 5 LED's



In-Built Power Bank to charge mobile
devices



ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (LxHxD)	BOX QTY.
LED680	55089	Floodlight	(INCH) 11-3/16 x 7 x 5-1/8 (MM) 288 x 178 x 131	1
LED680T	55090	Floodlight complete with tripod	11-3/16 x (27-1/2 to 67) x 5-1/8 288 x (695 to 1702) x 131	1