


| CAT<br>NR. | BLADE LENGTH (L1) |      | STOCK LENGTH (L2) |      |
|------------|-------------------|------|-------------------|------|
|            | (INCH)            | (MM) | (INCH)            | (MM) |
| SS/4G      | 4                 | 100  | 3                 | 75   |
| SS/6G      | 6                 | 150  | 4                 | 100  |

# Stock with Groove


---

ON INNER CORNER FOR CLEARING BURR OR DIRT

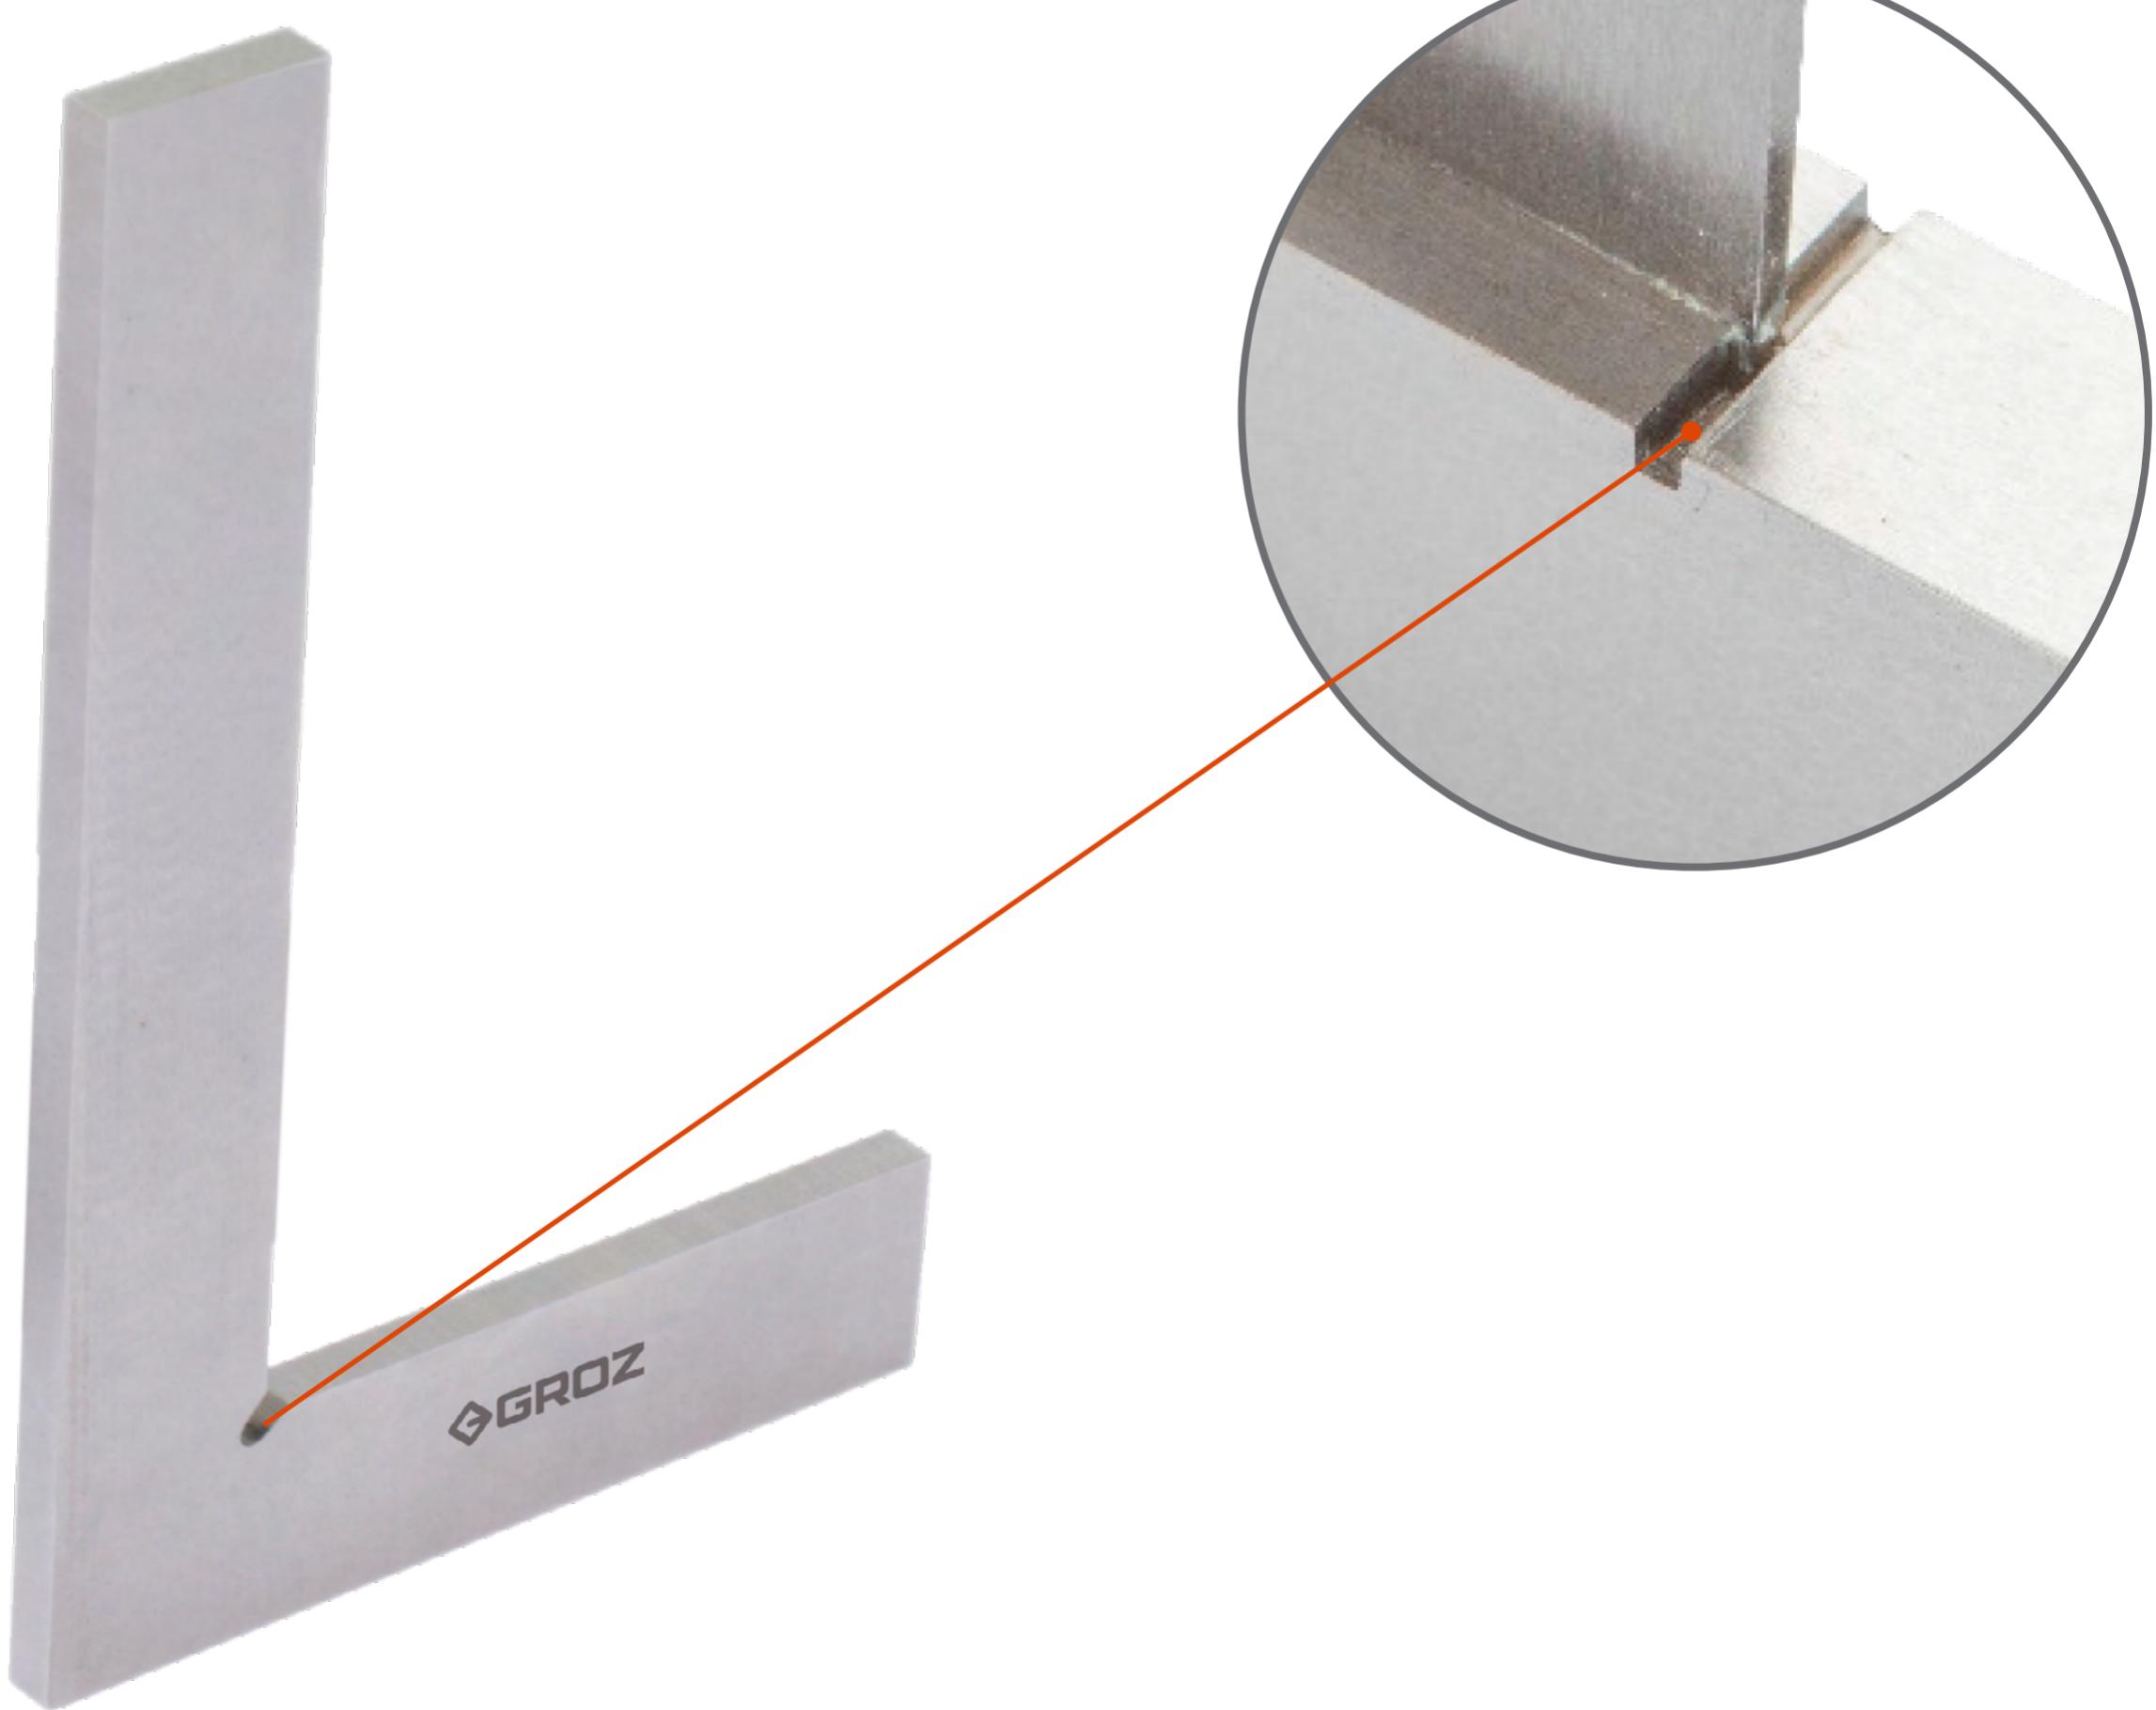

# Tapered Self-Locking Rivets

FOR PERFECT RIGIDITY

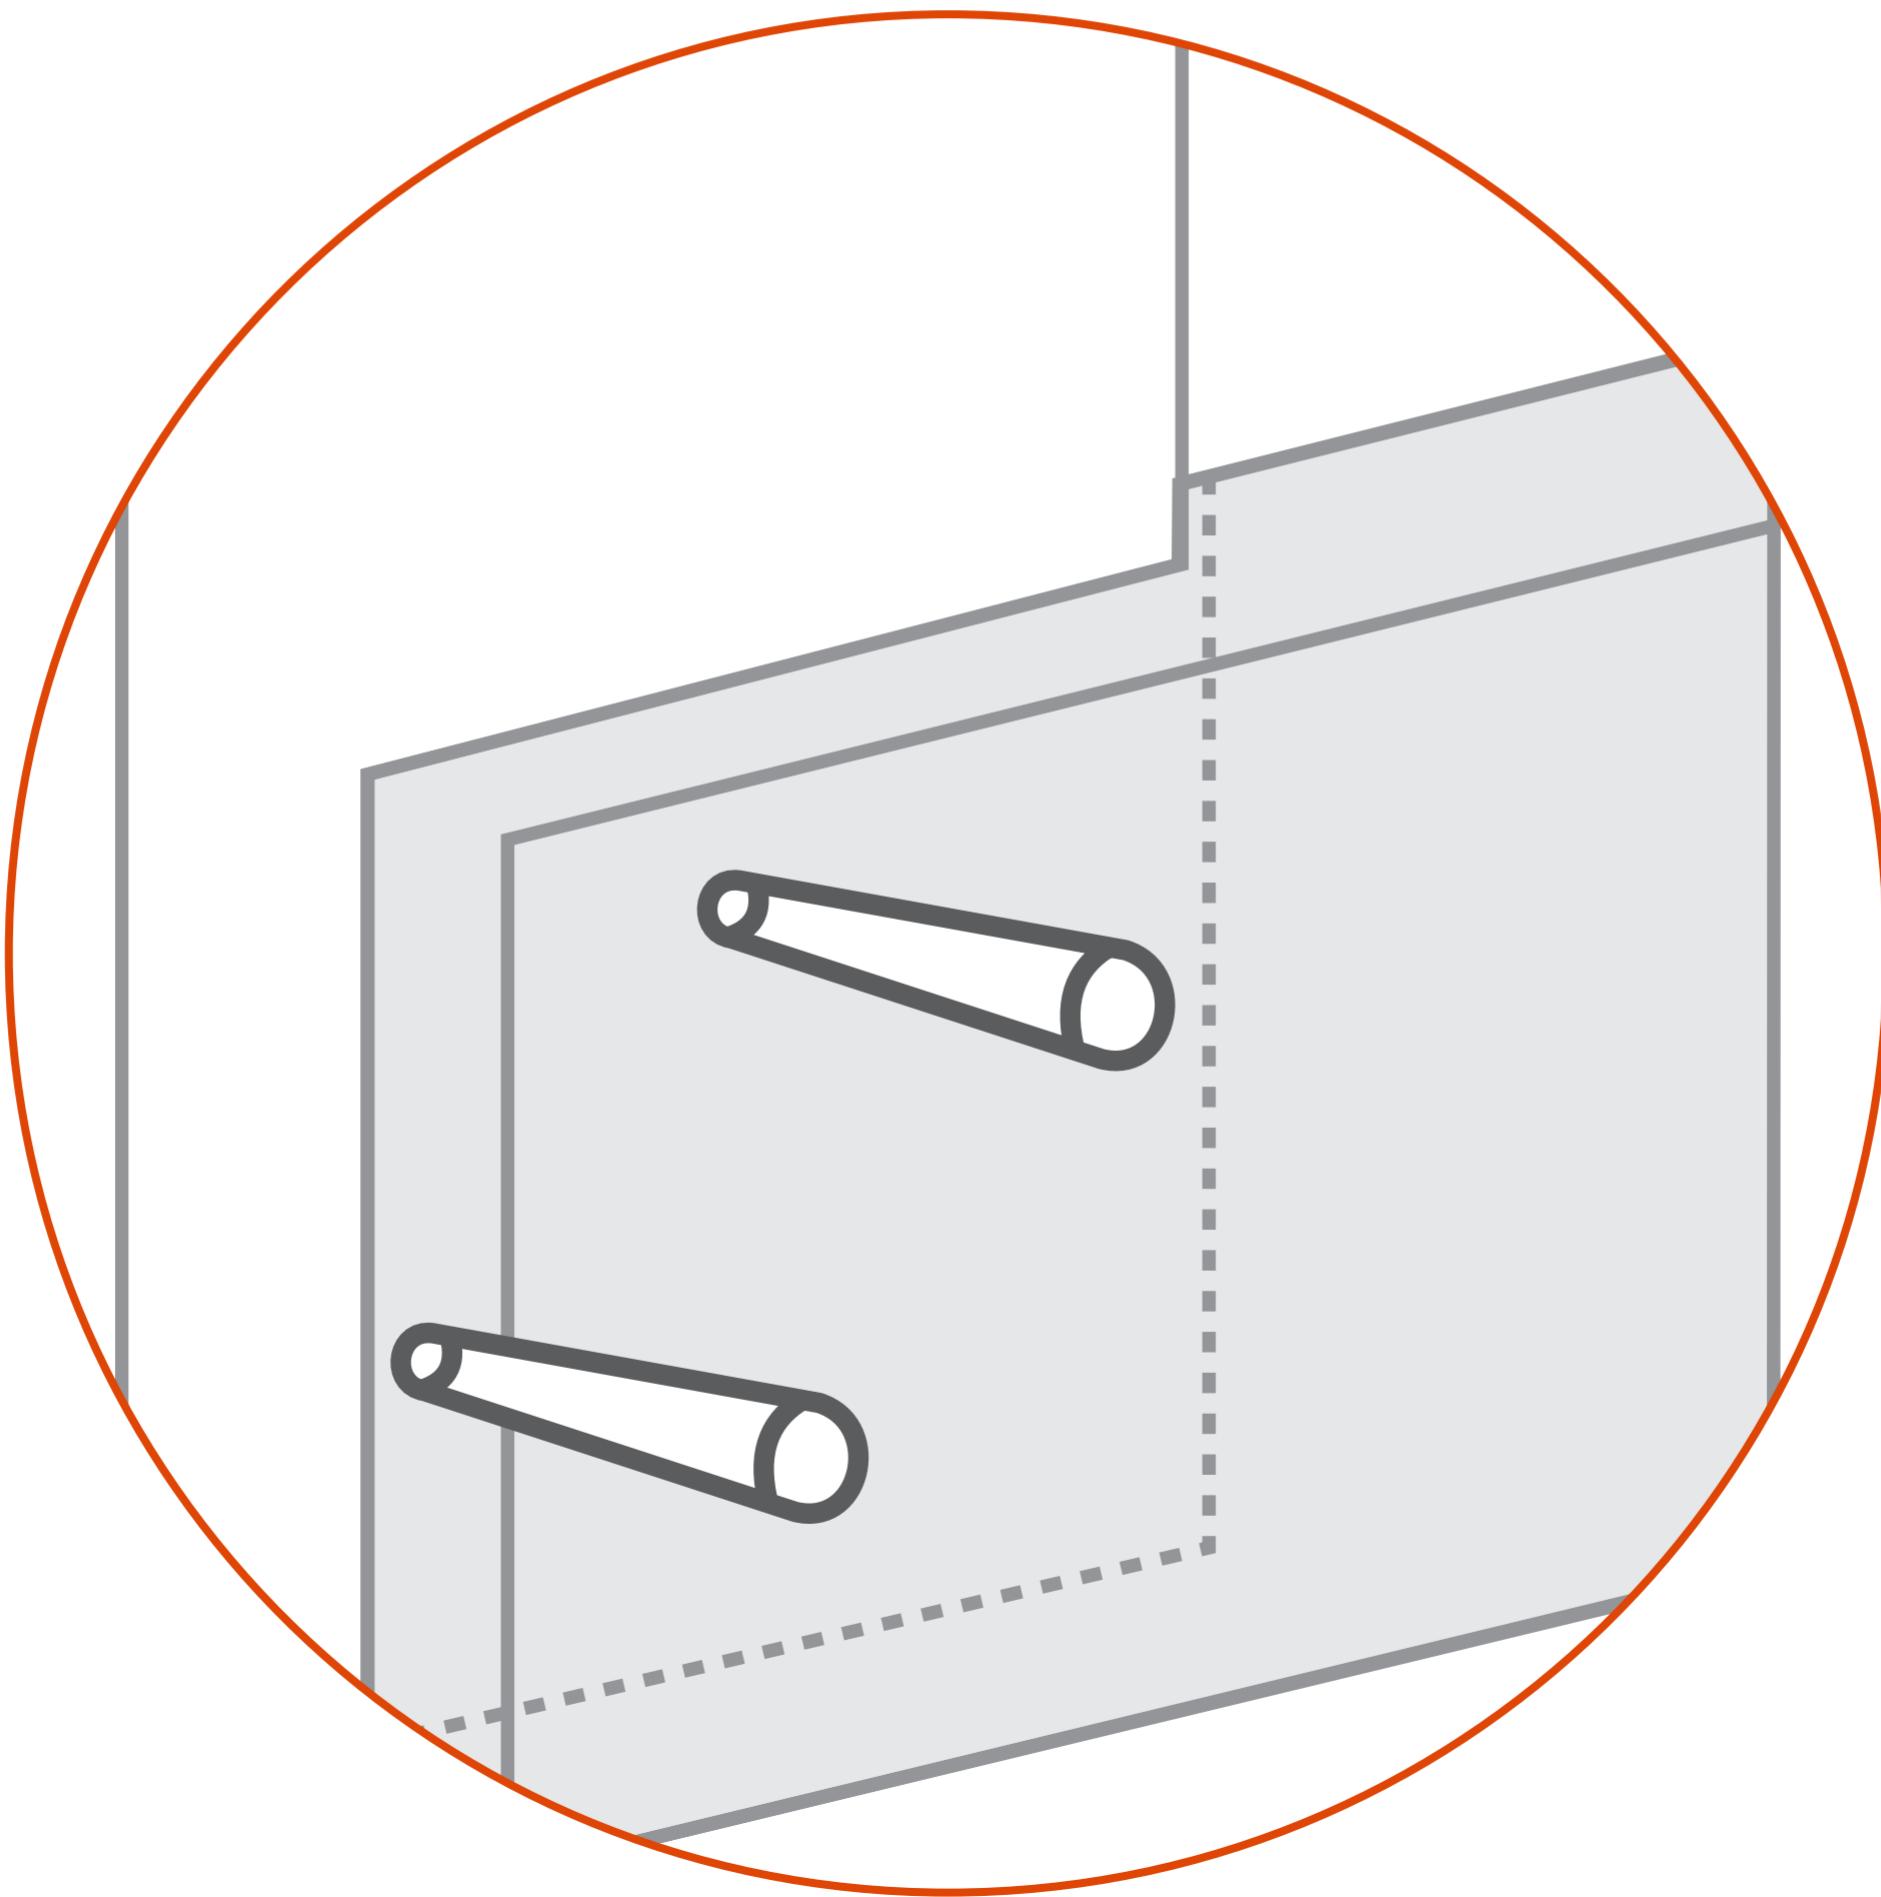

**For setting up, checking machinery & in  
everyday workshop use**



