


Air Operated Grease Gun High Power

G64



Pressure
Ratio
50:1


High power one shot air grease gun

Designed with grease cylinder on top for optimal balance

For use in factory maintenance, farm, fleet service or for use from vehicle air brake compressors

Available in 2 choices


- 6" (150 mm) steel extension & coupler
- 9" (225 mm) x 0.425" (11 mm) high pressure flexible hose & professional coupler

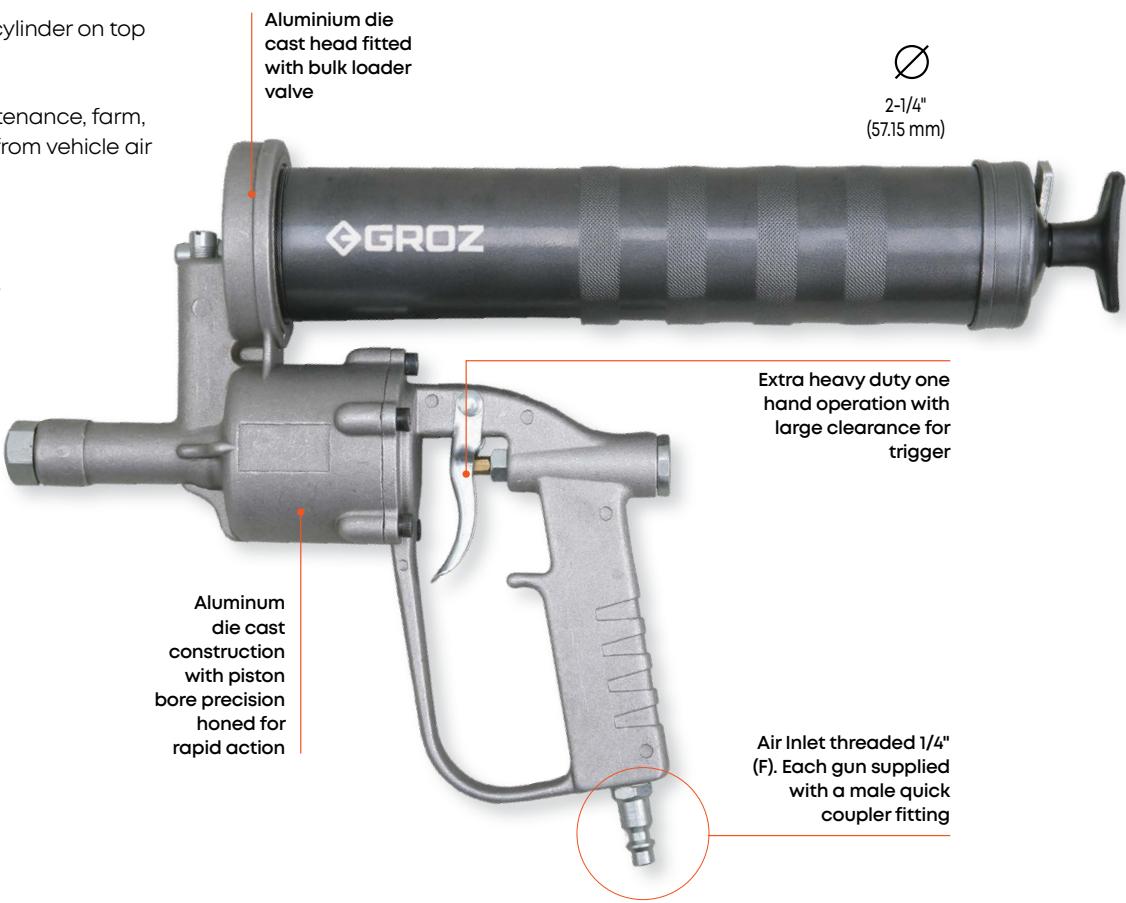

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 1 OZ. / 40 SHOTS	UPTO 0.68 GM / SHOT
AIR OPERATING RANGE	40-120 PSI	3-8 BAR
PRESSURE RATIO	50:1	
AIR COMPRESSOR VOLUME	1CFM @ 6 BAR	0.026 CBM @ 6 BAR
AIR INLET THREADING	1/4" (F)	

FILLING OPTIONS

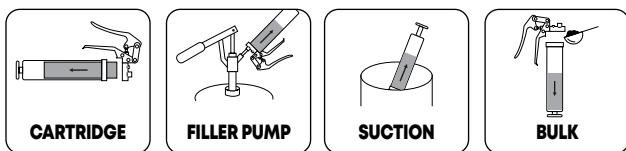

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		9" (225 MM) HIGH PRESSURE FLEXIBLE HOSE & COUPLER			
* G64R/B	43360	G64F-HP9/B	43370	1/8" BSPT	10
* G64R/M	43361	* G64F-HP9/M	43371	M10 x 1	10
G64R/N	43362	* G64F-HP9/N	43372	1/8" NPT	10

* Best Seller

WARNING

Always use lubricator unit with air supply