

167 Industrial Rotary Drum Pumps

Industry Standard for Rotary Pumps

Ideal for tough outdoor use in extreme weather conditions

Solid cast iron construction, fully CNC machined to close tolerances

Pump Handle rotates a high quality sintered powder metal 3 vane rotor inside a highly finished pumping chamber

Self lubricating & non-wearing graphite vanes

High quality graphite seal allows the pump to be used with a wide variety of fluids including Diesel with upto 15% Ethanol blend

Self Priming operation with flow rate up to 38 LPM (10 GPM)


Supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 50-205 litre (15-55 gallon) drums

WETTED COMPONENTS
Cast Iron, Steel, Graphite, Paper, Acetal, NBR

DO NOT USE WITH
With Water Based Media

FEATURES


FLOW RATE
UPTO 38 LPM (10 GPM)

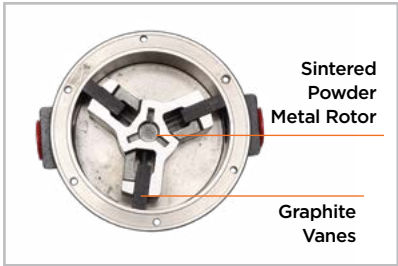

Pump Chamber with 3 Vane Construction



KIT/RBP/3V
Includes pump head gasket, graphite vanes (3), Vane springs(3) Shaft nut, packing nut, paper washers (3), & rod guide

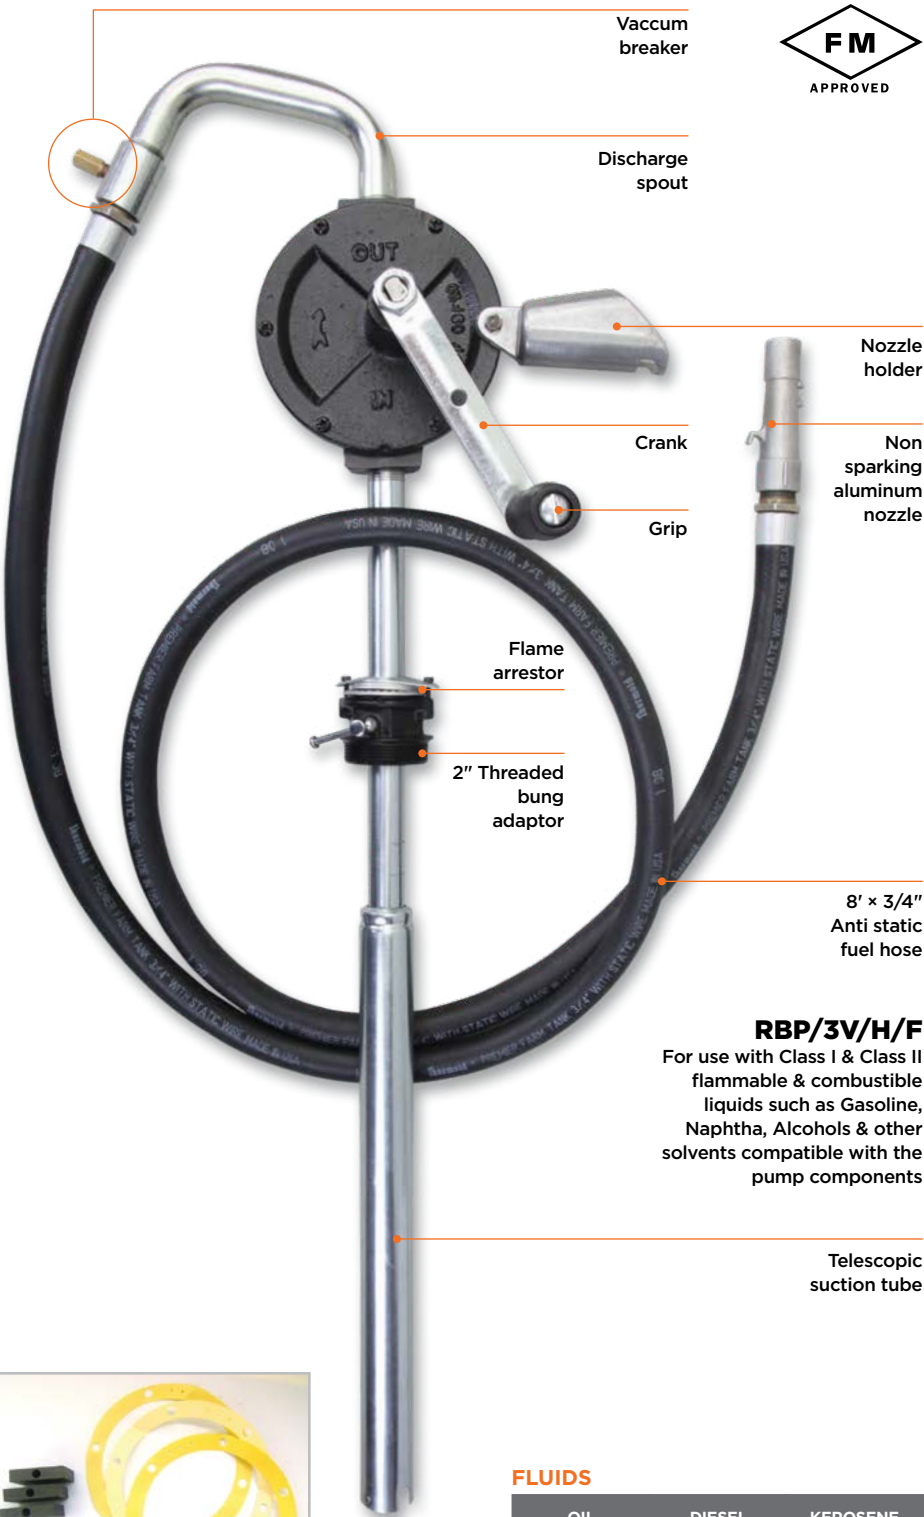

RBP/3V/H/F
For use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents compatible with the pump components

FLUIDS

OIL	DIESEL	KEROSENE
GASOLINE	BIO DIESEL	

VARIANTS

RBP/3V	RBP/3V/H
<ul style="list-style-type: none">For use with Petroleum based fluids, Diesel & KeroseneIdeal for use with barrels, drums & tanks for transferring media into smaller containers	<ul style="list-style-type: none">For use with Petroleum based fluids, Diesel & KeroseneIdeal for use with barrels, drums & tanks for quick refuelling of diesel powered vehicles & equipment
RBP/3V/H/MT	RBP/3V/F
<ul style="list-style-type: none">For use with Diesel & KeroseneIdeal for quick refuelling of diesel powered vehicles & equipment	<ul style="list-style-type: none">For use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents compatible with the pump components

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
★ RBP/3V	44080	Steel Discharge Spout	4
RBP/3V/H	44081	8' (1.8 m) Anti-Static Hose, Non-Sparking Aluminum Nozzle & Nozzle Holder	2
RBP/3V/H/MT	44085	8' (1.8 m) Anti-Static Hose, Non Sparking Aluminium Nozzle, Nozzle Holder & Mechanical Fuel Meter (Litres)	2
RBP/3V/H/MTG	44087	8' (1.8 m) Anti-Static Hose, Non Sparking Aluminium Nozzle, Nozzle Holder & Mechanical Fuel Meter (Gallons)	2
FM APPROVED PUMPS			
RBP/3V/F	44084	Steel Discharge Spout, Drip Pan with Flame Arrestor	4
★ RBP/3V/H/F	44082	8' (1.8 m) Anti-Static Hose, Non-Sparking Aluminum Nozzle & Nozzle Holder, Vacuum Breaker & Flame Arrestor	2
DP/RBP/3V	44083	Replacement Drip Pan only	10
SERVICE PARTS			
KIT/RBP/3V	44086	Repair Kit	-
SA/HOS/RBP/3V	44338	8' (1.8 m) x 3/4" Replacement Hose	-

★ Best Seller